




BOARD & BATTEN

MATERIAL SPECIFICATIONS

WALL PANEL

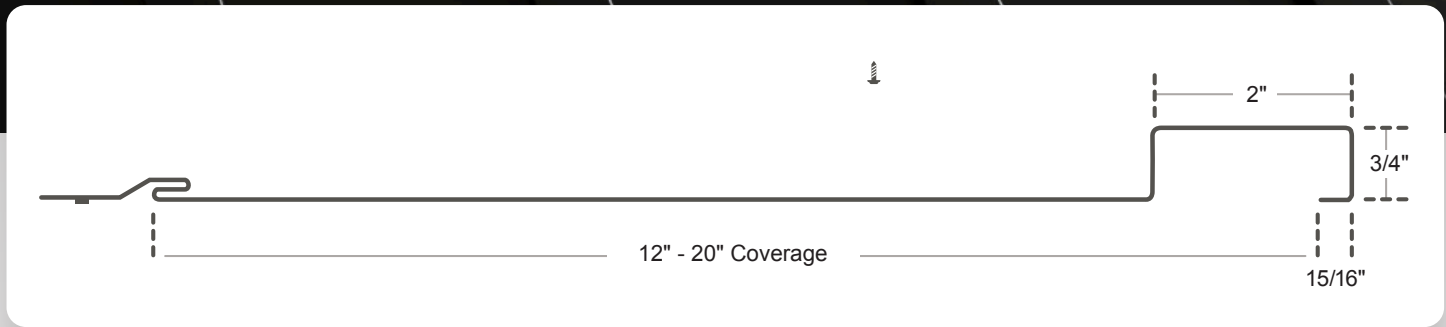

APPLICATION DETAILS

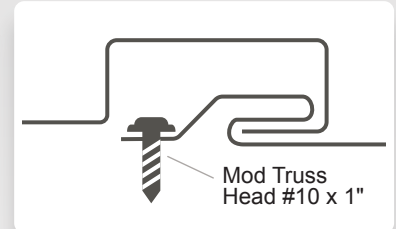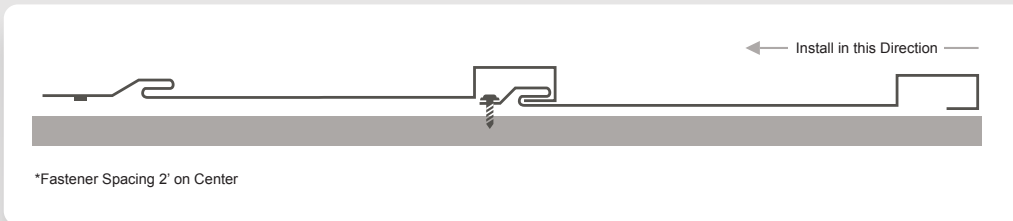

Available Widths: 12" - 20" (Standard)
Available Gauges: 24ga & 26ga (Special Order)
Weight: 1.00lbs/SqFt (24ga), .75lbs/SqFt (26ga)
Substrate: AZ-50, Grade D, 50,000ksi
Available Materials: Painted
Paint Systems: Weather XL (26ga), Fluropon (PVDF) (24ga)
Warranties: Weather XL (26g), Fluropon (PVDF) (24ga)

Production Options: Either factory made to length, crated up to 20' panels to ensure damage free transport or rolled to length on site.*
***On site production is subject to order minimums.**
Panel Options: Flat Panel, Striations, Pencil Ribs or Bead Roll (Flat Panel requires a waiver).
Installation: Can be installed on solid wood decking.
Minimum Slope: Wall Mount Only
Specifications for:
Class 4 Hail Impact
Class A Fire Rating

Please Note: It is the responsibility of the builder to ensure that they are compliant with current building codes. Builders should ensure proper substructure alignment and gauge suitability. All loading must conform to applicable codes. Panel lengths should not exceed 20'-0" for all gauges listed. Installation must meet local building codes and standards. Verify warranties and finishes with product specifications and manufacturer warranties. Fastener spacing directly affects the panel's load capacity.

Oil Canning is not a reason for rejection of panels