


# QuickLoc™



## MATERIAL SPECIFICATIONS

## ROOF & WALL PANEL

### QUICKLOC™

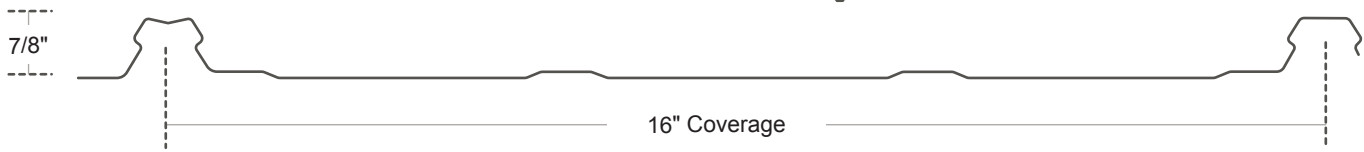

### SCREW GUIDE AND CLIP EXAMPLE

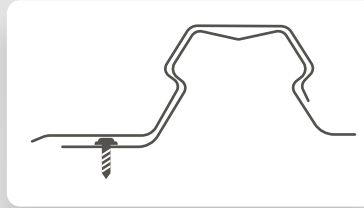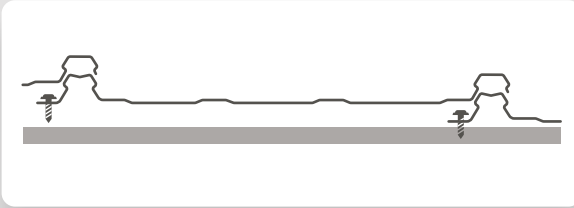

**Available Widths:** 16"

**Available Gauges:** 26ga

**Weight:** 0.75lbs/SqFt

**Substrate:** High-tensile steel, 80 ksi

**Available Materials:** Painted materials featuring corrosion-resistant metallic finish.

**Paint Systems:** Weather XL (26ga)

**Warranties:** Weather XL (26ga)

#### Panel Options:

Major Rib Configuration: Trapezoidal, Snap Lock.

Anti Siphon groove for additional protection.

#### Production Options:

Factory made to length, crated up to 50' to ensure damage free transport.

**Minimum Slope:** 2:12

#### Testing Standards:

Contact manufacturer for additional load tables and testing standards.

### LOAD TABLES

Span Type (psf)	2 ft	2.5 ft	3 ft	3.5 ft	4 ft	4.5 ft	5 ft
Simple Span	178	112	70	44	29	20	15
Two-Span	138	90	63	46	36	28	23
Multi-Span	159	104	73	54	41	33	27

The Engineering data contained herein is for the expressed use of customers and design professionals. Along with this data, it is recommended that the design professional have a copy of the most current version of the North American Specification for the Design of Cold-Formed Steel Structural Members published by the American Iron and Steel Institute to facilitate design. The Specification contains the design criteria for cold formed steel components.

Along with the Specification, the designer should reference the most current building code applicable to the project jobsite in order to determine environmental loads. If further information or guidance regarding cold-formed design practices is desired, please contact the manufacturer.

#### Please Note:

Builders should ensure proper substructure alignment and gauge suitability.

Installation over solid sheathing recommended.

Fastener spacing directly affects the panel's load capacity.

#### Trim Specifications:

Compatible with system designs; inquire for custom options and pricing.

#### Warranty Guideline:

For complete warranty details, contact the manufacturer directly.



**1-855-METALUS** (638-2587)  
7728 CORN MAZE WAY, POST FALLS, ID 83854  
**WWW.METALAMERICA.COM**

**SALES@METALAMERICA.COM**

\*\*Metal America is neither partially or solely responsible for improper installation or defects as a result of installation\*\*