

Flush Wall / Soffit

Flush Wall/Soffit is a concealed fastener system renowned for its sleek minimalistic appearance. This low-profile panel stands as an excellent choice for various projects. Traditionally used for roofing eaves and as part of a venting system with a ridge cap, it has gained popularity in siding, ceiling, and accent applications.

Featuring a broad spectrum of colors and finishes, Flush Wall/Soffit serves multiple purposes, from ceiling panels to wall coverings and wainscots.

Flush Wall / Soffit

PENCIL RIB



MATERIAL SPECIFICATIONS

Available Widths: 12" or 16"

Available Gauges: 26ga, (Inquire for 24ga)

Weight: 1.00lbs/SqFt (24ga), .75lbs/SqFt (26ga)

Substrate: Grade 50

TRIM SPECIFICATIONS

Compatible: with system designs, custom trim available in all colors and 10' 6" & 12' 6" lengths, priced by profile girth.

Material: Manufactured in 24 and 26 gauge Painted, Galvalume, and G90 Galvanized finishes.

Warranty Guideline: Warranty information is a guideline; request complete details from the manufacturer.

Testing Standards: ASTM E 263, ASTM E 283, ASTM E 330, ASTM E 331, 2014 FBC Approved

Oil Canning is not a reason for rejection of panels

Notes: The Engineering data contained herein is for the expressed use of customers and design professionals. Along with this data, it is recommended that the design professional have a copy of the most current version of the North American Specification for the Design of Cold-Formed Steel Structural Members published by the American Iron and Steel Institute to facilitate design.

Note: Builders should ensure proper substructure alignment and gauge suitability. All loading must conform to applicable codes. Verify warranties and finishes with product specifications and manufacturer

COLOR OPTIONS

Available Materials: Painted

Paint Systems: Weather XL (26ga), Fluoropon (PVDF) (24ga)

OPTIONS

Production Options*: Either factory made to length.

Soffit: V Rib required, can be vented or non-vented.

Flush Wall Siding: V Rib Panel or Flat (Flat Panel requires an oil canning waiver).


*Set up fee may apply.

The Specification contains the design criteria for cold formed steel components. Along with the Specification, the designer should reference the most current building code applicable to the project jobsite in order to determine environmental loads. If further information or guidance regarding cold-formed design practices is desired, please contact the manufacturer.


warranties. Fastener spacing directly affects the panel's load capacity.

WALL PANEL

PANEL PROFILE

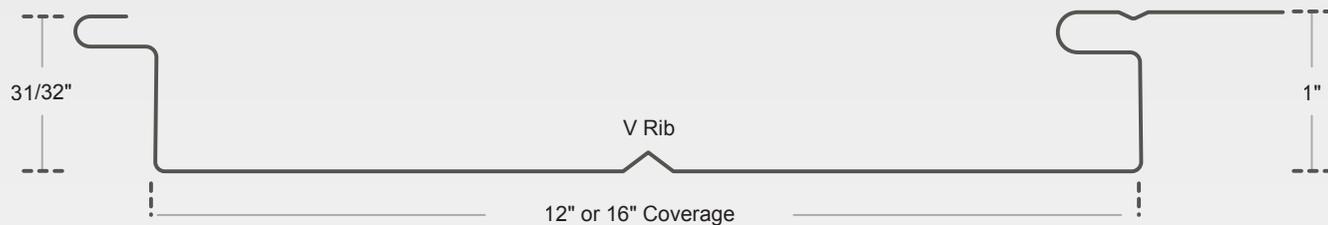

SCREW PATTERN

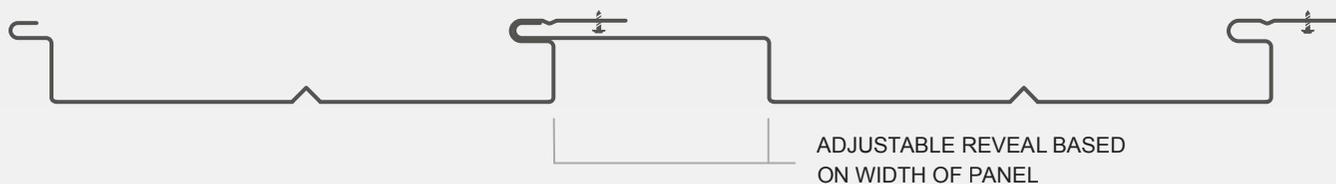

LANCED SOFFIT PANEL PATTERN

