

# 1.75" Snap Lock

The 1.75" Snap Lock Panel is a medium-gauge roofing and wall panel designed for light commercial, industrial, and agricultural applications. Ideal for large areas requiring long runs, this panel accommodates thermal expansion and provides versatile 14" coverage. We offer on-site roll forming and notching for ease in extended installations, and the fixed clip system ensures a straightforward installation process. With industry-leading finishes and robust weather resistance, this system is built for all climates.

# 1.75" Snap Lock

FLAT



## MATERIAL SPECIFICATIONS

**Available Widths:** 14"

**Available Gauges:** 26ga, (Inquire for 24ga)

**Weight:** 1.25lbs/SqFt (22ga), 1.00lbs/SqFt (24ga), 0.75lbs/SqFt (26ga)

**Substrate:** Grade 50

**Minimum Slope:** 2:12

## OPTIONS

**Production Options\*:** Either factory made to length, crated up to 50' panels to ensure damage free transport, or rolled to length on site. Notching available on panels 6' in length or greater.

**Panel Options:** Flat Panel, Striations, 2 - Minor Ribs (Flat Panel requires an oil canning waiver).

\*Set up fee may apply.

On site production is subject to order minimums

## COLOR OPTIONS

**Available Materials:** Painted

**Paint Systems:** Weather XL (26ga), Fluoropon (PVDF) (24ga)

## TRIM SPECIFICATIONS

**Installation:** Can be installed over open frame steel purlins, steel decking, steel decking with polyiso board, or solid wood decking. Clip system required for installation.

**Warranties:** Weather XL (26ga), Fluoropon (PVDF) (24ga)


**Testing For 1.75" Snap Lock Only:** UL 580 Wind Uplift (Class 90), UL 2218 Class 4 Hail Impact, UL 790 Class A Fire Rating, ASTM E1680, ASTM E1646, ASTM E283, ASTM E331, ASTM E330/E330M, ASTM E1592

# ROOF & WALL PANEL

## 2 - MINOR RIBS




## STRIATIONS

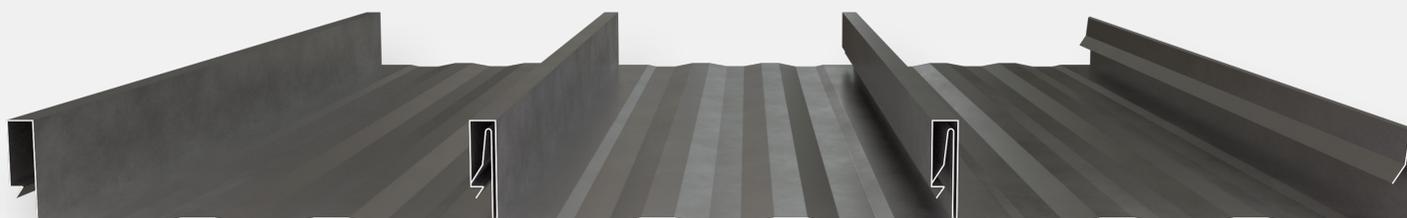

## PANEL PROFILE



## SCREW PATTERN

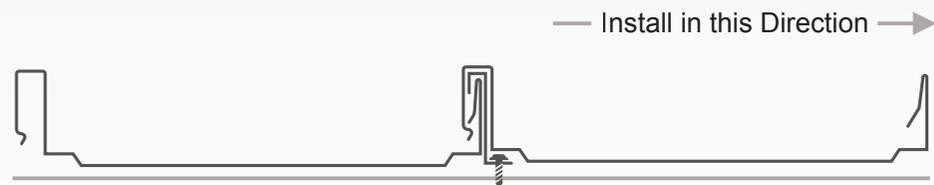

\*Clip Spacing (solid deck) 2' on center

## EAVES & END LAPS

