

Mechanically Seamed

The 1.5" and 2" Mechanical Standing Seam Panels are medium-gauge metal roofing and wall solutions designed for commercial, industrial, and agricultural applications. These commercial-grade panels feature a mechanically seamed installation and a concealed floating and fixed clip system, making them a perfect choice for low slopes and wide spans. This structural panel demonstrates impressive load-bearing capabilities over open purlins, spanning up to 5 feet, depending on load restrictions.

Mechanically Seamed

FLAT



MATERIAL SPECIFICATIONS

Available Widths:

2" Mechanical Lock: 14 5/16"

1.5" Mechanical Lock: 16 1/8"

Available Gauges: 26ga, (Inquire for 24ga)

Weight: 1.00lbs/SqFt (24ga), 0.75lbs/SqFt (26ga)

Substrate: Grade 50

OPTIONS

Production Options*: Either factory made to length, crated up to 50' panels to ensure damage free transport, or rolled to length on site. Notching available on panels 6' in length or greater.

Panel Options: Flat Panel, Striations, 2 - Minor Ribs (Flat Panel requires an oil canning waiver)

*Set up fee may apply.

Note: Builders should ensure proper substructure alignment and gauge suitability. All loading must conform to applicable codes. Verify warranties and finishes with product specifications and manufacturer warranties. Fastener spacing directly affects the panel's load capacity.

COLOR OPTIONS

Available Materials: Painted

Paint Systems: Weather XL (26ga), Fluoropon (PVDF) (24ga)

TRIM SPECIFICATIONS

2" MECHANICAL LOCK PANEL

Installation: Can be installed over steel decking, steel decking with polyiso board, or solid wood decking.

Minimum Slope: 1/2:12 (Hot melt recommended below 3:12)

1.5" MECHANICAL LOCK PANEL

Installation: Can be installed on solidwood decking.


Minimum Slope: 1:12 (Hot melt recommended below 3:12)

Warranties: Weather XL (26ga), Fluoropon (PVDF) (24ga)

Testing For 2" Mechanical: UL 580 Wind Uplift (Class 90), UL 2218 Class 4 Hail Impact, UL 790 Class A Fire Rating, ASTM E1680, ASTM E1646, ASTM E1592

WALL PANEL

2 - MINOR RIBS

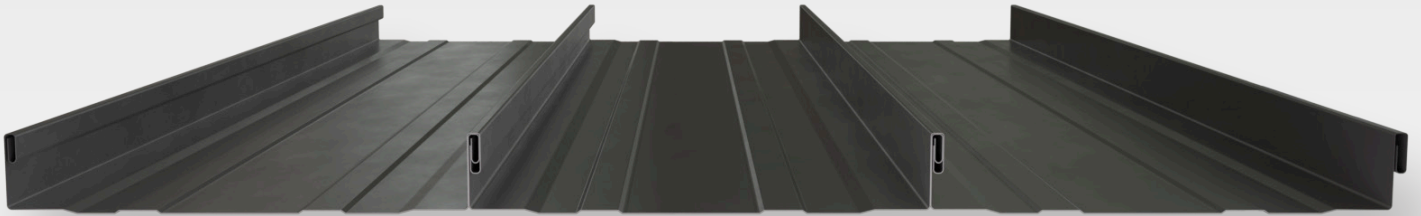


STRIATIONS




PANEL PROFILE

2" MECHANICALLY SEAMED PANEL SS200

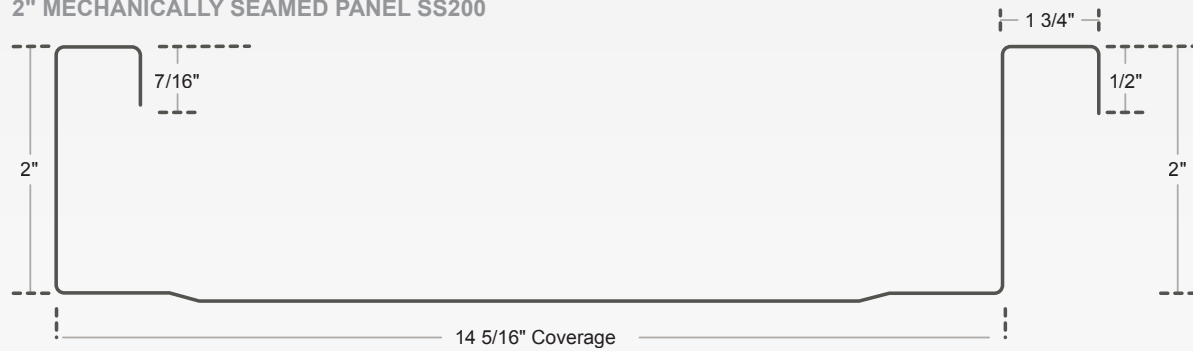


1.5" MECHANICALLY SEAMED PANEL SS150

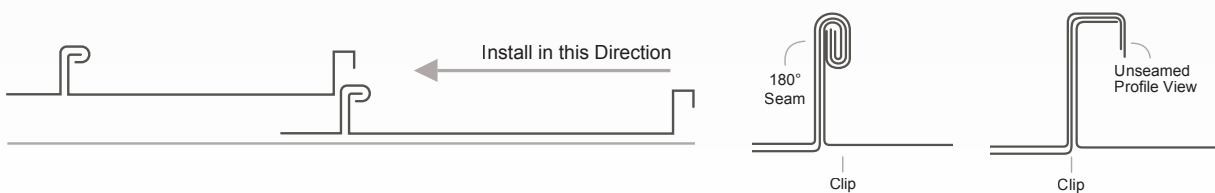


Mechanically Seamed

TRIM PROFILES



Ridge Cap Low Profile





Standing Seam Locking Ridge Cap




Standing Seam Locking Peak Cap





Standing Seam Box Gable




Standing Seam Locking Outside Corner




Standing Seam Locking Inside Corner



Standing Seam Locking Pitch Break

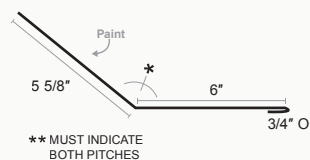

Standing Seam Pitch Break


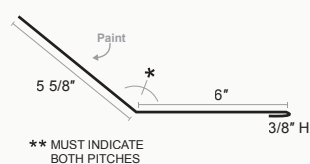


*Pitch must be specified when ordering.



Mechanically Seamed

TRIM PROFILES



Standing Seam Locking Reverse Pitch Break




Standing Seam Reverse Pitch Break





Standing Seam Base Metal





Z Metal Wall Lite




Z Bar

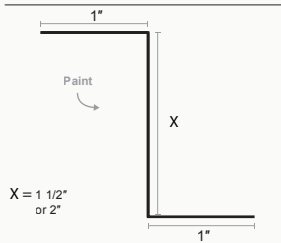


SnapZ

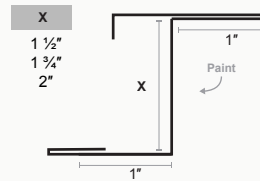

Chimney Flashing



Standing Seam W Valley


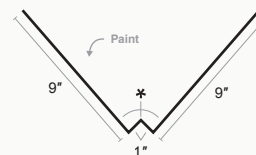


*Pitch must be specified when ordering.



Mechanically Seamed

TRIM PROFILES



Standing Seam Side Wall




Standing Seam Locking Side Wall




Eave Flashing





Custom Eave




Bull Nose Eave

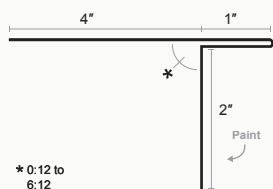


Style D

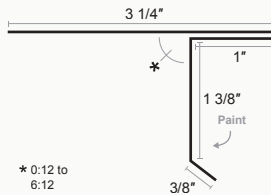


Standing Seam End Wall



Standing Seam Locking End Wall



Open Jamb



*Pitch must be specified when ordering.


Mechanically Seamed

TRIM PROFILES


Standing Seam Raised Cleat




Standing Seam Offset Cleat





Standing Seam Soffit C Metal

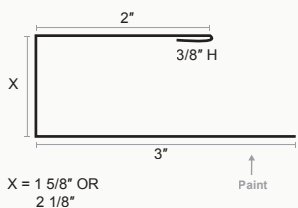



Soffit C Metal Color in

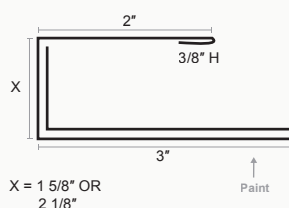


Style G Drip / Special Style G



Drip Flashing



Fascia Trim

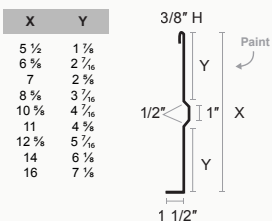

*Pitch must be specified when ordering.

